

# Silicone Rubber Sponge

## SIL15 FDA Compliant (Extrusion Grade)

### Material


Mainly closed cell Silicone Sponge

### Available Grades

SIL15 FDA

### Temperature

### Temperature Range

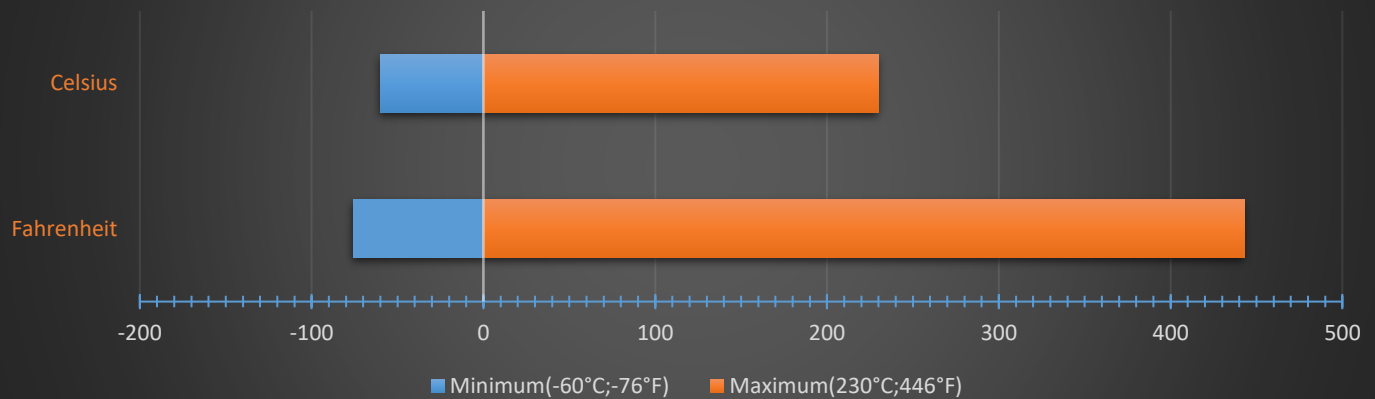

### General Information

The material should not be compressed by more than 50% of its original thickness, as the cells may break under such compression. The maximum compression recommended is 30% of initial thickness. Sealing with less than 30% compression helps reduce compression set and promotes product longevity.

Our SIL15 FDA range is in compliance with the American Food and Drugs Administration (FDA) 21 CFR 177-2600 & 175.300 it is as well compliant to German BfR Recommendation XV on silicone Food Contact. EU1935/2004 compliant.

These products meet the flammability requirements of FAR 25/J AR 25/ CS25 Appendix F, Part 1, (a)(1)(v) horizontal flammability test and Automotive Standard PART 571FMVSS302.

Can be formulated to meet AMS and ASTM sponge specifications.

The sponge is predominately closed cell with low water absorption and dust ingress protection up to IP65.

### Environmental Resistance

Silicone rubber products have an excellent resistance to:

- ❖ Ozone
- ❖ Oxidation
- ❖ Ultraviolet light
- ❖ Corona discharge
- ❖ Cosmic radiation
- ❖ Ionising radiation
- ❖ Weathering in general

### Availability Format

#### EXTRUSIONS

- ✓ Cord, section, strip, profiles
- ✓ Joined rings and gaskets
- ✓ Pressure sensitive adhesive backing
- ✓ Full range of standard colours
- ✓ Capability to colour match

### Typical Applications

- ❖ Automotive
- ❖ Electronics
- ❖ Energy
- ❖ Construction
- ❖ Heating and Ventilation (HVAC)
- ❖ Industrial
- ❖ Insulations
- ❖ Lighting and Marine
- ❖ High and Low temperature gaskets and seals
- ❖ Food sensitive and Food Processing
- ❖ Medical and Pharmaceutical

# Technical Data Sheet

## Silicone Rubber Sponge

SILICONES<sub>0</sub>

### SIL15 FDA Compliant (Extrusion Grade)

#### Mechanical Properties

EXTRUSIONS		SIL 15	
Property	Units	Typical Value	Test Method
Density *	kg.m <sup>3</sup> lb.ft <sup>3</sup>	350 21.8	BSENISO 845 ASTM D3574
Hardness **	Shore OO Shore A	50-60 ±5 <7-10	ASTM D2240
Compression Stress 40% strain ***	kPa PSI	78 11.3	BSENISO 3386 part 1, 2
Tensile Strength	MPa PSI	0.45 65	BSENISO 1798 ASTM D412
Elongation to failure	%	140	BSENISO 1798 ASTM D412
Compression Set 50% Compression 24hrs Recovery. 22hrs @ 70°C (158°F)	%	<1	BSENISO 1856
Compression Set 50% Compression 24hrs Recovery. 22hrs @ 100°C (212°F)	%	<1	BSENISO 1856

In-house capabilities for extensive industry specific testing available on request

\*Density measured on 25mm diameter cord sample. The density of samples of different sizes will be different from that stated here.

\*\*Hardness measured on 10mm thick samples. At less than 10mm the measured hardness will increase with density.

\*\*\*Compression Stress measured on samples as defined by BSENISO 3386. The compressive stress on samples of different dimensions, especially thickness, may vary from that quoted here. For further information about physical properties for other sample sizes, please contact the technical department.

It is not possible to perform a Shore A hardness test on sponge material. These values are provided as a guideline for comparison to solid materials and as such are not designed for use in specifications.

For further information about physical properties of other sample sizes, please contact the technical department.

**General Characteristics**

Test	Result	Standard
Brittle Point	-80°C (-112 °F)	ASTM D746
Limiting Oxygen Index	24.0 %	BS 2782 Part 1
Thermal Conductivity	$6.1 \times 10^{-2} \text{ W.m}^{-1} . \text{K}^{-1}$	BS 874 Part 2
Radiation Resistance	>10 <sup>5</sup> Grays (10 <sup>7</sup> Rads) typical	

**Accreditations**

- ❖ American Food and Drugs Administration (FDA) 21 CFR 177.2600
- ❖ Directive EC 1935/2004
- ❖ FAR 25/JAR 25/CS 25 Appendix F, Part 1, (a)(1)(iv)(a)(1)(v) horizontal flammability test
- ❖ Automotive Standard PART 571FMVSS302
- ❖ EU 1935/2004 compliant

**Additional Information**

- ❖ Platinum cured
- ❖ Smooth and dry surface
- ❖ Well finished edges