


GASKET SHEETS

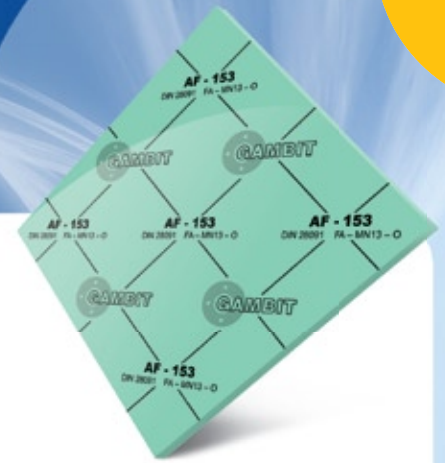

TECHNICAL SPECIFICATION

Gasket sheet Gambit AF-153

Material

Gasket sheet **GAMBIT AF-153** is based on natural fibres, mineral fibres, and fillers bound with NBR, NR and SBR rubber-based binder.

Designation according to DIN 28091-2: **FA-MN13-O**

General properties and applications

Low-parameter sheet, recommended mostly for water supply and sewage mains.

Admissions / Certificates

WRAS*
PZH

Maximum working conditions

Peak temperature	°C	180
Temperature under continuous operation	°C	155
Temperature under continuous operation with steam	°C	130
Pressure	MPa	4

Dimensions


Standard thicknesses of sheets /thicknesses above 4.0 mm are produced by gluing/	mm	0,5; 0,8 1,0; 1,5; 2,0; 2,5 3,0; 4,0; 5,0; 6,0	± 0,1 ± 10% ± 10%
Standard dimensions of sheets /custom dimensions available within the total range of 1500x3000 mm/	mm	1500x1500	±10,0

Non-standard thicknesses, graphiting of sheet surfaces, and reinforcement with metallic mesh available upon request.

* Certified version available upon request.

All information in this catalogue is based on years of experience in manufacture and use of the discussed products. Since sealing performance in the joint is subject to multiple factors such as mounting method, system parameters, and sealed medium, technical parameters specified herein are of informative nature only and cannot be used as grounds for any claims; any special uses of products are subject to consulting with the manufacturer.


GASKET SHEETS

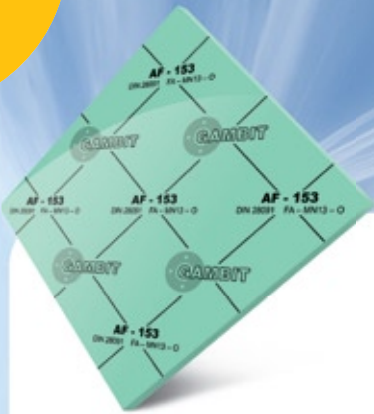

Physical and chemical properties

Density	± 5%	g/cm³	1,9	DIN 28090-2
Transverse tensile strength	min.	MPa	5	DIN 52910
Compressibility	typical value	%	10	ASTM F36
Elastic recovery	min.	%	50	ASTM F36
Residual stresses 50 MPa/16 h/175 °C/	min.	MPa	20	DIN 52913
Colour	light green			

(Values as detailed in table refer to 2.0 mm thick gasket sheets)

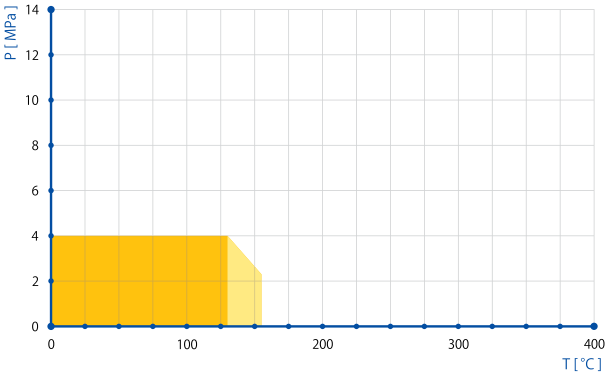

It is not recommended that maximum temperature and pressure are applied simultaneously. Pressure to temperature correlation for sheet thickness 2.0 mm is shown in the diagram.

- There is no requirement for trials.
- Trials should be run if the application involves steam.

All information in this catalogue is based on years of experience in manufacture and use of the discussed products. Since sealing performance in the joint is subject to multiple factors such as mounting method, system parameters, and sealed medium, technical parameters specified herein are of informative nature only and cannot be used as grounds for any claims; any special uses of products are subject to consulting with the manufacturer.