


# AIR & MULTIPURPOSE

AIR &  
MULTIPURPOSE  
General Purpose  
Heavy Duty  
Push-on

## WINGFOOT®

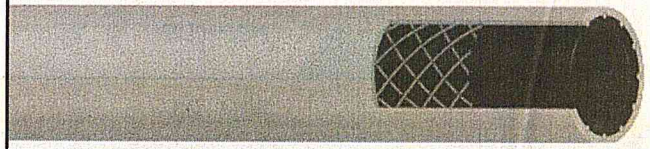

### Product Specifications

**APPLICATION:** A good-quality, economical general purpose hose for industrial air service, compressor lines, pneumatic tools, low-pressure spray and many other applications where the need for oil resistance is moderate. Nonconductive, minimum electrical resistance greater than one (1) megohm per inch of length of hose at 1000 V DC. Available in 200 and 300 PSI working pressures.

**CONSTRUCTION TUBE:** Nitrile synthetic rubber, RMA Class A (high oil resistance)

**COVER:** Red, Blue, or Black Chemivic™ synthetic rubber, RMA Class B (medium oil resistance)

**REINFORCEMENT:** Spiral synthetic yarn

**TEMPERATURE:** -20°F to 190°F (-29°C to 88°C)

**PACKAGING:**

3/16" – 3/4"	500' reels, maximum 3 pieces, 50' increments
1"	450' reels, maximum 3 pieces, 50' increments
1 1/4"	400' reels, maximum 3 pieces, 50' increments
1 1/2"	300' reels, maximum 3 pieces, 50' increments

Coupled assemblies available in 1/4", 3/8", and 1/2" in red.

**BRANDING:** Example: Wingfoot® Nonconductive 1/2" (12.7 mm) 200 psi WP. Made in USA Goodyear®.

**COUPLINGS:** Contact fitting manufacturer for proper fitting recommendation and coupling procedure.

**NON-STOCK/SIZES:** For special production run minimum requirements, see Appendix D.

**ORDER CODES:** See next page.

CHEMICAL  
TRANSFER

CLEANING  
EQUIPMENT

FOOD  
Transfer  
Washdown

MARINE

MATERIAL  
HANDLING  
Abrasives  
Bulk Transfer  
Cement & Concrete

MINING

PETROLEUM  
Aircraft Fueling  
Dispensing  
Dock  
Transfer

SPRAY

STEAM

VACUUM

VEYANCE

WATER  
Discharge  
Suction &  
Discharge  
Washdown

WELDING

COUPLING  
SYSTEMS

APPENDIX

**GOODYEAR**  
ENGINEERED PRODUCTS

# AIR & MULTIPURPOSE

AIR &  
MULTIPURPOSE  
General Purpose  
Heavy Duty  
Push-on

## WINGFOOT® 200

ORDER CODES: 569-005 (black)

569-007 (red)

569-036 (blue)

ID		NOM. OD		MAX. WP		WEIGHT	
in.	mm.	in.	mm.	psi	Mpa	lb./ft.	kg./m.
3/16	4.8	0.44	11.2	200	1.38	0.07	0.10
1/4	6.4	0.53	13.5	200	1.38	0.10	0.15
5/16	7.9	0.63	16.0	200	1.38	0.14	0.21
3/8	9.5	0.69	17.5	200	1.38	0.15	0.22
1/2	12.7	0.84	21.3	200	1.38	0.21	0.31
5/8	15.9	1.00	25.4	200	1.38	0.27	0.40
3/4	19.1	1.13	28.7	200	1.38	0.38	0.57
1	25.4	1.47	37.3	200	1.38	0.58	0.86

## WINGFOOT® 300

ORDER CODES: 569-006 (black)

569-008 (red)

569-037 (blue)

ID		NOM. OD		MAX. WP		WEIGHT	
in.	mm.	in.	mm.	psi	Mpa	lb./ft.	kg./m.
3/16	4.8	0.44	11.2	200	1.38	0.07	0.10
1/4	6.4	0.54	13.7	300	2.07	0.14	0.21
5/16	7.9	0.64	16.3	300	2.07	0.18	0.27
3/8	9.5	0.69	17.5	300	2.07	0.19	0.28
1/2	12.7	0.86	21.8	300	2.07	0.26	0.39
5/8	15.9	1.02	25.9	300	2.07	0.33	0.49
3/4	19.1	1.19	30.2	300	2.07	0.42	0.63
1	25.4	1.50	38.1	300	2.07	0.62	0.92
1¼	31.8	1.77	45.6	250	1.72	0.84	1.25
1½	38.1	2.08	53.2	250	1.72	1.04	1.55

- CHEMICAL TRANSFER
- CLEANING EQUIPMENT
- FOOD Transfer Washdown
- MARINE
- MATERIAL HANDLING
  - Abrasives
  - Bulk Transfer
  - Cement & Concrete
- MINING
- PETROLEUM
  - Aircraft Fueling
  - Dispensing
  - Dock Transfer
- SPRAY
- STEAM
- VACUUM
- VEYANCE
- WATER
  - Discharge
  - Suction & Discharge
  - Washdown
- WELDING
- COUPLING SYSTEMS
- APPENDIX

