

6 Bar

(-40°C + 145°C)

SMS 1145



DRINTEX AG SMS-**

SMS-M1

SMS-M2

DRINTEX IG SMS-**

SMS-V1

SMS-V2

DRINTEX ZM SMS-**

SMS-ZM1

SMS-ZM2



1.



2.

DIN 2817



3.



4.

DIN 2817




5.



6.

DIN 2817

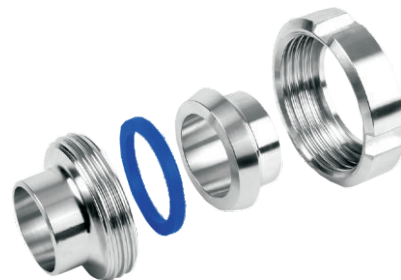

SMS 1145



RD v palcích

40x1,6

48x1,6

60x1,6

70x1,6

85x1,6

98x1,6

132x1,6

RD DIN 405/1

DN: 25, 32, 38, 51, 63,5, 76, 101,6

40/25 Bar (-30°C + 120°C)

DIN 11851



DRINTEX AG 11851

DRINTEX IG + MATKA

DRINTEX IG 11851



1.



2.

DIN 2817



3.



Komplet

4.

DIN 2817



5.



6.

DIN 2817

DIN 11851



RD v palcích

34x1,8

44x1,6

52x1,6

58x1,6

65x1,6

65x1,6

78x1,6

95x1,6

95x1,6

104x1,6

110x1,4

130x1,4

RD DIN 405/1

DN: 15, 20, 25, 32, 38, 40, 50, 63, 65, 75, 80, 100