




ART. 8430.701

Various industrial hose reels

Fixed hose reel, s.430, for welding, 20 bar, twin gum hose SBR/EPDM 13 m, 2 x $\varnothing$ 1/4"

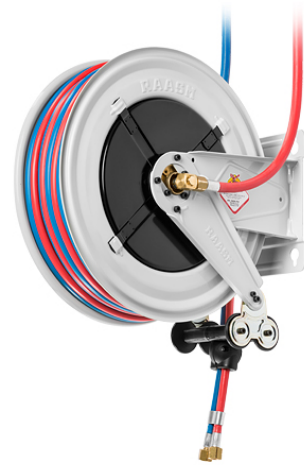

FLUIDS

OXYGEN/ACETYLENE

SECTORS

BUILDING INDUSTRY AND ROAD CONSTRUCTION | MANUFACTURING INDUSTRY | MINING | SHIPPING AND OFFSHORE

CERTIFICATIONS

ATEX (ZONE 2) | ATEX (ZONE 22)

Features	UM	Value
Pressure	bar	20
Compatible fluids		welding
Swivel joint		brass
Seals		Viton®
Characteristic		fixed
Material		painted steel
Couplings		brass
Hose		973.913
$\varnothing$ and hose length	$\varnothing$ - m	2 x 1/4" - 13
Inlet		G 3/8" (m)
Outlet		G 3/8" (m)
Reel flow path		brass - zinc plated steel
Internal drum width	mm	97

RAASM SpA


via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.



Overall dimensions

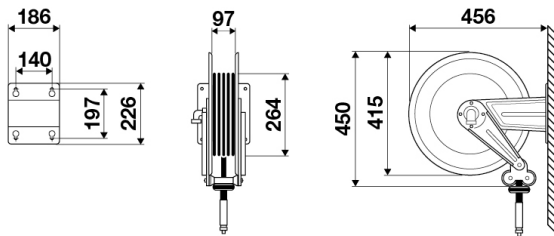

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.