




ART. 8530.703

Various industrial hose reels

Fixed hose reel, s.530, for welding, 20 bar, twin gum hose SBR/EPDM 15 m, 2 x $\varnothing$ 5/16"

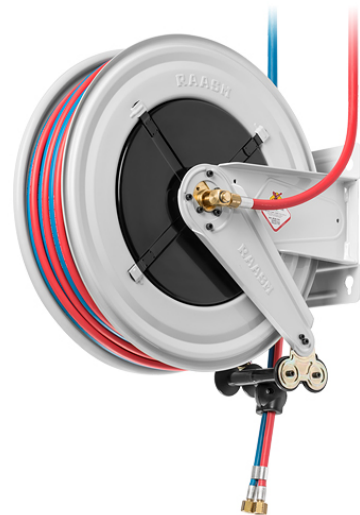


FLUIDS	OXYGEN/ACETYLENE
SECTORS	BUILDING INDUSTRY AND ROAD CONSTRUCTION MANUFACTURING INDUSTRY MINING SHIPPING AND OFFSHORE
CERTIFICATIONS	ATEX (ZONE 2) ATEX (ZONE 22)

Features	UM	Value
Pressure	bar	20
Compatible fluids		welding
Swivel joint		brass
Seals		Viton®
Characteristic		fixed
Material		painted steel
Couplings		brass
Hose		974.915
$\varnothing$ and hose length	$\varnothing$ - m	2 x 5/16" - 15
Inlet		G 3/8" (f)
Outlet		G 3/8" (f)
Reel flow path		brass - zinc plated steel
Internal drum width	mm	104



Overall dimensions

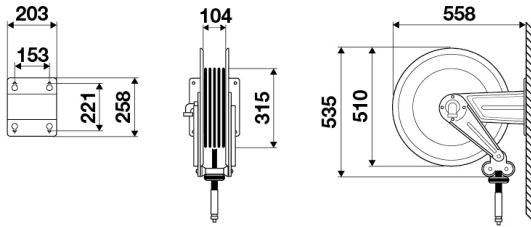

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.