



ART. 8540.301

Hose reels - s. 540-560

Fixed hose reel, s.540, for hot water, 200 bar, with black rubber hose 30 m, $\varnothing$ 3/8"



FLUIDS

WATER

SECTORS

AERONAUTIC | AGRICULTURE | AUTOMOTIVE | LUBE TRUCK AND INDUSTRIAL VEHICLE | BUILDING INDUSTRY AND ROAD CONSTRUCTION | RAILWAY TRANSPORT | MANUFACTURING INDUSTRY | MINING

CERTIFICATIONS

ATEX (ZONE 1) | ATEX (ZONE 21)

Features	UM	Value
Pressure	bar	200
Compatible fluids		water max 130 °C
Swivel joint		AISI 304 stainless steel
Seals		Viton®
Characteristic		fixed
Material		painted steel
Couplings		zinc plated steel
Hose		995.530
$\varnothing$ and hose length	$\varnothing$ - m	3/8" - 30
Inlet		G 3/8" (f)
Outlet		G 3/8" (f)
Reel flow path		AISI 304 stainless steel - zinc plated steel
Internal drum width	mm	165

RAASM SpA


via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.



Overall dimensions

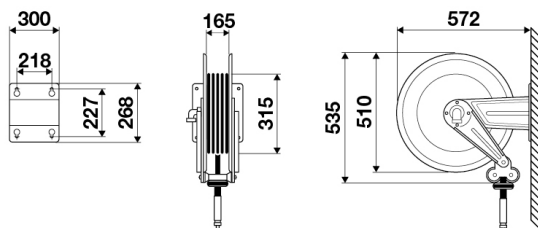

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.