



ART. 8550.202

Hose reels - s. 540-560

Swivelling hose reel, s.540, for hot water, 100 bar, without hose 20 m, $\varnothing$ 3/4"



FLUIDS

WATER

SECTORS

AERONAUTIC | AGRICULTURE | AUTOMOTIVE | LUBE TRUCK AND INDUSTRIAL VEHICLE | BUILDING INDUSTRY AND ROAD CONSTRUCTION | RAILWAY TRANSPORT | MANUFACTURING INDUSTRY | MINING

CERTIFICATIONS

ATEX (ZONE 1) | ATEX (ZONE 21)

Features	UM	Value
Pressure	bar	100
Compatible fluids		water max 130 °C
Swivel joint		AISI 304 stainless steel
Seals		Viton®
Characteristic		swivelling
Material		painted steel
Couplings		zinc plated steel
Hose		997.320
$\varnothing$ and hose length	$\varnothing$ - m	3/4" - 20
Inlet		G 1" (f)
Outlet		G 3/4" (m)
Reel flow path		AISI 304 stainless steel - zinc plated steel
Internal drum width	mm	165

RAASM SpA


via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.



Overall dimensions

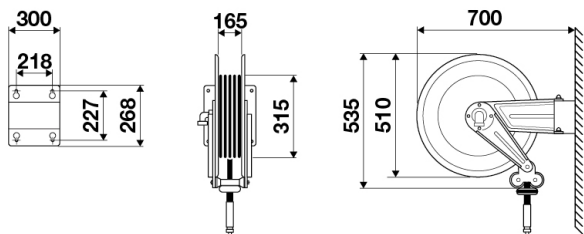

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.