



WATER MAX 130 °C - 100-200-400 bar

AISI 304 STAINLESS STEEL

Supplied with:

- AISI 304 stainless steel couplings
- AISI 304 stainless steel swivel joint
- "Viton®" seals (100-200 bar)
- "Teflon®" seals (400 bar)




ATEX directive
IIB 2 GD c T4 T135 °C X

FIXED



SWIVELLING



S. 430



Water 130 °C **100** bar

Article
8434.200

Article
8424.200

Connection

inlet
F1/2"G

outlet
F1/2"G

Water 130 °C **200** bar

Article
8434.300

Article
8424.300

F3/8"G

F1/2"G

Water 130 °C **400** bar

Article
8434.350

Article
8424.350

F3/8"G

F1/2"G

S. 530



Water 130 °C **100** bar

Article
8534.200

Article
8524.200

F1/2"G

F1/2"G

Water 130 °C **200** bar

Article
8534.300

Article
8524.300

F3/8"G

F1/2"G

Water 130 °C **400** bar

Article
8534.350

Article
8524.350

F3/8"G

F1/2"G

S. 540



Water 130 °C **100** bar

Article
8544.200

Article
8554.200

F1"G

F1"G

Article
8544.205

Article
8554.205

F1/2"G

F1/2"G

Water 130 °C **200** bar

Article
8544.300

Article
8554.300

F3/8"G

F1/2"G

Water 130 °C **400** bar

Article
8544.350

Article
8554.350

F3/8"G

F1/2"G

S. 560



Water 130 °C **100** bar

Article
8564.200

-

F1"G

F1"G

Article
8564.206

-

F1/2"G

F1/2"G

Water 130 °C **200** bar

Article
8564.300

-

F3/8"G

F1/2"G

Water 130 °C **400** bar

Article
8564.350

-

F3/8"G

F1/2"G


FIXED HOSE REELS INSTALLATION

The quick coupling support is equipped with 4 slot holes that allow an easy and safe installation of the hose reels.

The **template** supplied facilitates drilling of the holes and there fore hose reels fixing.

SWIVELLING HOSE REELS INSTALLATION

The **quick coupling swivelling support** facilitates hose reels installation and enables **55° rotation** to the right or left or locking in **fixed positioned at 0°** by means of clamping with two screws.

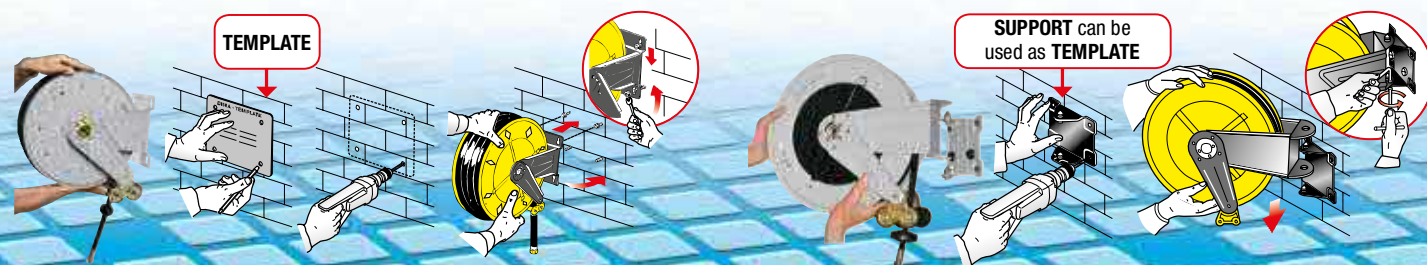



WATER MAX 130 °C - 200 bar

AISI 304 STAINLESS STEEL



ATEX directive
IIB 2 GD c T4 T135 °C X

FIXED




Article

8332.300
8332.301
8333.301

S. 330
hygienic hose

SWIVELLING



Article

-
-
-

Supplied with:

- hoses in black synthetic rubber
- zinc plated steel couplings
- AISI 304 stainless steel swivel joint
- "Viton®" seals



Hose supplied	Connection	
	inlet	outlet
without hose	F3/8"G	F 3/8"G
12m - 5/16" (994.512)	F3/8"G	F3/8"G
12m - 5/16" (994.612)	F3/8"G	F3/8"G

8392.300
8392.302
8393.301

S. 390
hygienic hose

8382.300
8382.302
8383.301

without hose	F3/8"G	F 3/8"G
17m - 5/16" (994.517)	F3/8"G	F3/8"G
12m - 5/16" (994.612)	F3/8"G	F3/8"G

8434.300
8432.301
8432.302
8433.302

S. 430
hygienic hose

8424.300
8422.301
8422.302
8423.302

without hose	F3/8"G	F1/2"G
12m - 3/8" (995.512)	F3/8"G	F3/8"G
18m - 3/8" (995.518)	F3/8"G	F3/8"G
18m - 3/8" (995.618)	F3/8"G	F3/8"G

for ABS hose reels Series 430 see page 153

8534.300
8532.301
8532.302
8533.302

S. 530
hygienic hose

8524.300
8522.301
8522.302
8523.302

without hose	F3/8"G	F1/2"G
20m - 3/8" (995.520)	F3/8"G	F3/8"G
25m - 3/8" (995.525)	F3/8"G	F3/8"G
25m - 3/8" (995.625)	F3/8"G	F3/8"G

8544.300
8542.301
8543.301

S. 540
hygienic hose

8554.300
8552.301
8553.301

without hose	F3/8"G	F1/2"G
30m - 3/8" (995.530)	F3/8"G	F3/8"G
30m - 3/8" (995.630)	F3/8"G	F3/8"G


8564.300
8562.301
8562.302

S. 560

-
-
-


without hose	F3/8"G	F1/2"G
40m - 3/8" (995.540)	F3/8"G	F3/8"G
50m - 3/8" (995.550)	F3/8"G	F3/8"G

FIXED OVERALL DIMENSIONS

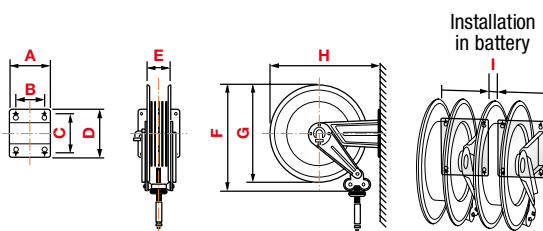

Art.	A	B	C	D	E	F	G	H	I	1-m ³	kg *
S. 330	186	140	196	226	110	355	350	365	20	0,045	from 8 to 13
S. 390	186	140	196	226	110	400	390	410	20	0,068	from 11 to 18
S. 430	186	140	196	226	115	460	420	460	20	0,098	from 14 to 24
S. 530	203	153	220	258	115	550	510	560	20	0,120	from 19 to 42
S. 540	300	218	228	268	190	550	510	573	0	0,175	from 24 to 40
S. 560	488	399	238	272	368	550	510	578	0	0,310	from 30 to 80

SWIVELLING OVERALL DIMENSIONS

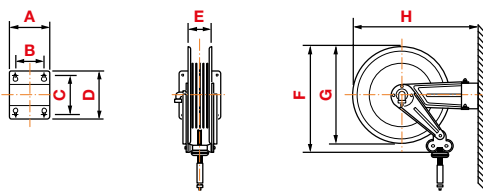

Art.	A	B	C	D	E	F	G	H	1-m ³	kg
S. 380	184	146	106	144	110	400	390	484	0,098	from 12 to 19
S. 420	208	162	118	164	115	460	420	541	0,098	from 15 to 25
S. 520	228	182	154	200	115	560	510	642	0,120	from 20 to 43
S. 550	300	218	226	268	190	560	510	702	0,175	from 25 to 41

* The list shows min and max weight for each series: min weight refers to version without hose, max weight refers to heaviest version which depends on hose length and diameter.



WATER MAX 130 °C* - 100 bar

AISI 304 STAINLESS STEEL



ATEX directive
IIB 2 GD c T4 T135 °C X

FIXED



Article

8332.400


S. 330

hygienic hose

8332.201

8333.202

SWIVELLING



Article

-

-

-

Supplied with:

- hoses in black synthetic rubber
- zinc plated steel couplings
- AISI 304 stainless steel swivel joint
- "Viton®" seals



Hose supplied	Connection	
	inlet	outlet
without hose	F1/2"G	F 3/8"-1/2"G
12m - 3/8" (995.313)	F1/2"G	M3/8"G
12m - 3/8" (995.412)	F1/2"G	M3/8"G

without hose	F1/2"G	F3/8"-1/2"G
17m - 3/8" (995.318)	F1/2"G	M3/8"G
12m - 3/8" (995.412)	F1/2"G	M3/8"G

without hose	F1/2"G	F1/2"G
10m - 1/2" (996.311)	F1/2"G	M1/2"G
15m - 1/2" (996.316)	F1/2"G	M1/2"G
15m - 1/2" (996.415)	F1/2"G	M1/2"G

for ABS hose reels Series 430 see page 153

without hose	F1/2"G	F1/2"G
20m - 1/2" (996.321)	F1/2"G	M1/2"G
25m - 1/2" (996.425)	F1/2"G	M1/2"G

without hose	F1"G	F1"G
20m - 3/4" (997.320)	F1"G	M3/4"G
15m - 1" (998.315)	F1"G	M1"G
20m - 3/4" (997.420)	F1"G	M3/4"G


without hose	F1"G	F1"G
30m - 1" (998.330)	F1"G	M1"G

* 50 bar

* 50 bar


* Effective temperature only for versions without hose. For the maximum temperature of the versions with hose, contact technical dept.

FIXED OVERALL DIMENSIONS

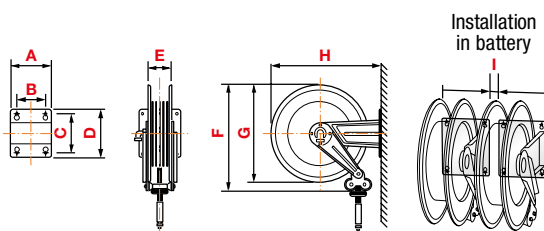

Art.	A	B	C	D	E	F	G	H	I	1-m³	kg*
S. 330	186	140	196	226	110	355	350	365	20	0,045	from 8 to 13
S. 390	186	140	196	226	110	400	390	410	20	0,068	from 11 to 18
S. 430	186	140	196	226	115	460	420	460	20	0,098	from 14 to 24
S. 530	203	153	220	258	115	550	510	560	20	0,120	from 19 to 42
S. 540	300	218	228	268	190	550	510	573	0	0,175	from 24 to 40
S. 560	488	399	238	272	368	550	510	578	0	0,310	from 30 to 80

SWIVELLING OVERALL DIMENSIONS

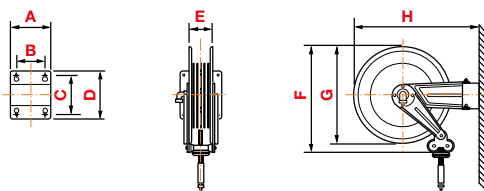

Art.	A	B	C	D	E	F	G	H	1-m³	kg
S. 380	184	146	106	144	110	400	390	484	0,098	from 12 to 19
S. 420	208	162	118	164	115	460	420	541	0,098	from 15 to 25
S. 520	228	182	154	200	115	560	510	642	0,120	from 20 to 43
S. 550	300	218	226	268	190	560	510	702	0,175	from 25 to 41

* The list shows min and max weight for each series: min weight refers to version without hose, max weight refers to heaviest version which depends on hose length and diameter.



WATER MAX 130 °C - 400 bar

AISI 304 STAINLESS STEEL



ATEX directive
IIB 2 GD c T4 T135 °C X


FIXED



Article

8332.350

SWIVELLING



Article

-

Supplied with:

- hoses in black synthetic rubber
- zinc plated steel couplings
- AISI 304 stainless steel swivel joint
- "Teflon®" seals



Hose supplied	Connection	
	inlet	outlet
without hose	F3/8"G	F3/8"G

S. 330

S. 390

S. 430

S. 530

S. 540

S. 560

8392.350

8392.352

8382.350

8382.352

8434.350

8432.354

8433.354

8424.350

8422.354

8423.354

8534.350

8532.352

8533.352

8524.350

8522.352

8523.352

8544.350

8564.350

-

without hose

17m - 5/16" (994.717)

without hose

15m - 3/8" (995.815)

15m - 3/8" (995.915)

without hose

25m - 3/8" (995.825)

25m - 3/8" (995.925)

without hose

without hose

F3/8"G

F3/8"G

F3/8"G

F3/8"G

F3/8"G

F3/8"G

F3/8"G

F3/8"G

F3/8"G

F3/8"G

F3/8"G

F1/2"G

F3/8"G

F3/8"G

F1/2"G


F3/8"G

F3/8"G

F1/2"G


F1/2"G

FIXED OVERALL DIMENSIONS

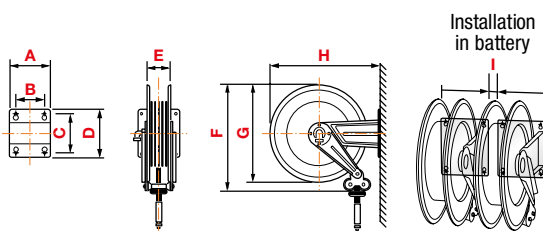

Art.	A	B	C	D	E	F	G	H	I	1-m ³	kg *
S. 330	186	140	196	226	110	355	350	365	20	0,045	from 8 to 13
S. 390	186	140	196	226	110	400	390	410	20	0,068	from 11 to 18
S. 430	186	140	196	226	115	460	420	460	20	0,098	from 14 to 24
S. 530	203	153	220	258	115	550	510	560	20	0,120	from 19 to 42
S. 540	300	218	228	268	190	550	510	573	0	0,175	from 24 to 40
S. 560	488	399	238	272	368	550	510	578	0	0,310	from 30 to 80

SWIVELLING OVERALL DIMENSIONS

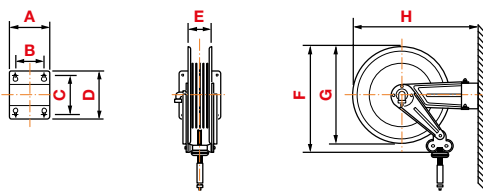

Art.	A	B	C	D	E	F	G	H	1-m ³	kg
S. 380	184	146	106	144	110	400	390	484	0,098	from 12 to 19
S. 420	208	162	118	164	115	460	420	541	0,098	from 15 to 25
S. 520	228	182	154	200	115	560	510	642	0,120	from 20 to 43
S. 550	300	218	226	268	190	560	510	702	0,175	from 25 to 41

* The list shows min and max weight for each series: min weight refers to version without hose, max weight refers to heaviest version which depends on hose length and diameter.