

Temperature Regulation Quick Connect Couplings

plug size 13.5 mm **Serie ESD**

- Couplings with O-ring-sealing and one-hand operation
- For temperature regulation applications with hot or cold water as well as tempered oil
- Optional with straight-through, single or double shut-off
- Hose couplings available with standard stem profile for standard hoses (quick-fit profile for quick-fit hoses on request)
- All couplings available with disconnect-protection with a surcharge. Just add "S" on Type No.

Materials

- Body, valve body, valve, plug: Brass MS 58 plain
- Sleeve: Brass MS 58 plain/ nickel-pl.
- Spring, retaining ring: Stainless steel 1.4310
- Balls: Stainless steel 1.4034
- O-rings: FKM (PTFE-coated)

Max. Working Pressure	Temperature	DN	Thread	Operation	Type of valve	Media	
PN 15 bar	-20°C – +200°C	9	ISO 228 / DIN 13	One-hand	single/double/straight-thr.	Tempered media	Coupl. 5 / Plug 10

Couplings with hose connection

Couplings with straight standard hose stem without/with valve

Hose connection	L	D	L1	DS	Passage	Weight	Type No. w/o valve	Type No. w valve
Hose i.D. 9	61.5	22	25	13.5	7	72	ESD 9 TL	ESD 9 TLAB
Hose i.D. 13	61.5	22	25	13.5	9	81	ESD 13 TL	
Hose i.D. 13	61.5	22	25	13.5	9	81		ESD 13 TLAB

Couplings with 45° standard hose stem without/with valve


Hose connection	L	D	L1	DS	Passage	Weight	Type No. w/o valve	Type No. w valve
Hose i.D. 9	51	22	30	13.5	7	103	ESD 9 TL-45	ESD 9 TL-45AB
Hose i.D. 13	51	22	30	13.5	9	109	ESD 13 TL-45	ESD 13 TL-45AB

Couplings with 90° standard hose stem without/with valve

Hose connection	L	D	L1	DS	Passage	Weight	Type No. w/o valve	Type No. w valve
Hose i.D. 9	51	22	30	13.5	7	105	ESD 9 TL-90	ESD 9 TL-90AB
Hose i.D. 13	51	22	30	13.5	9	111	ESD 13 TL-90	ESD 13 TL-90AB



Suitable hose clips, double-ear clips or crimping ferrules for standard hoses (©page 414 - 417)

DN 9



Plug Profile (original size)


**International
Plug Profile**

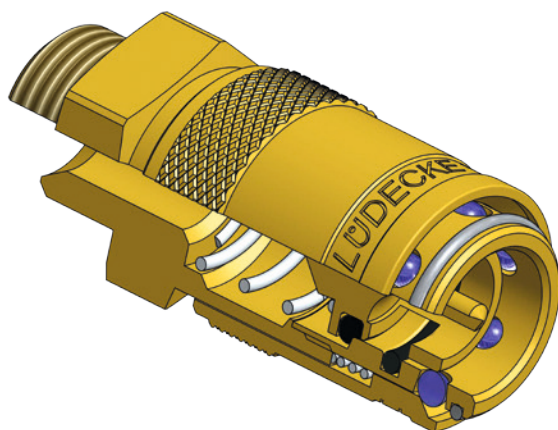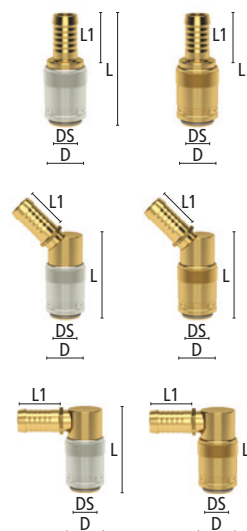

Temperature Regulation Quick Connect Couplings

plug size 13.5 mm **Series ESD**

DN9



Plug Profile (original size)

Diversion coupling for temperature regulation bridges for tube connection 90° with/without valve

Connection	L	D	DS	Passage	Weight	Type No. w/o valve	Type No. w valve
Tube 10/8	53	17	13.4	8	118	ESD 10-U	ESD 10-UAB



Tube (chamfered) for diversion couplings (temperature regulation tube), hardened brass

Connection	L	D	Passage	Weight	Type No.
Tube 10/8	250	10	8	60	TR 250-10
Tube 10/8	500	10	8	120	TR 500-10



Plain End Coupling

Connection	L	D	DS	Weight	Type No.
closed	37	22	13.5	67	ESD-B



Plugs


Plugs with standard hose stem without valve

Hose connection	L	D	L1	L2	DS	Passage	Weight	Type No.
Hose i.D. 6	41	14.5	22.5	15.5	13.5	5	20	ESD 6 SL
Hose i.D. 9	41	14.5	22.5	15.5	13.5	7	23	ESD 9 SL
Hose i.D. 13	43.5	16	25	15.5	13.5	9	25	ESD 13 SL



Plugs with straight male thread without valve (inner cone DIN 3863)

Thread connection	L	SW	L1	L2	DS	Passage	Weight	Type No.
G 1/8 m	27	15	7	15.5	13.5	6	16	ESD 18 NA*
G 1/4 m	29	15	9	15.5	13.5	9	17	ESD 14 NA*
R 1/4 m	32	15	12	15.5	13.5	9	21	ESD 14 NAR*
G 3/8 m	29	17	9	15.5	13.5	9	22	ESD 38 NA*
R 3/8 m	32	17	12	15.5	13.5	9	26	ESD 38 NAR*
G 1/2 m	32	22	12	15.5	13.5	9	42	ESD 12 NA*
G 3/4 m	36.5	27	16	15.5	13.5	9	77	ESD 34 NA*
M 10x1 m	27	15	7	15.5	13.5	6.5	14	ESD 101 NA
M 14x1.5 m	29	15	9	15.5	13.5	9	16	ESD 1415 NA
M 16x1.5 m	29	17	9	15.5	13.5	9	20	ESD 1615 NA




Plugs with straight female thread without valve

Thread connection	L	SW	L1	L2	DS	Passage	Weight	Type No.
G 1/4 f	27	17	9	15.5	13.5	9	21	ESD 14 NI*
G 3/8 f	27.5	22	10	15.5	13.5	9	32	ESD 38 NI*
G 1/2 f	29.5	24	12	15.5	13.5	9	55	ESD 12 NI*



Plugs with 90° male thread without valve (metrical thread DIN 158 / conical thread DIN 2999)

Thread connection	L	SW	L1	L2	DS	Passage	Weight	Type No.
R 1/4 m	35.5	17	11	15.5	13.5	9	45	ESD 14 NA-90*
M 14x1.5 m	35.5	17	11	15.5	13.5	9	47	ESD 1415 NA-90
R 3/8 m	35.5	17	12	15.5	13.5	9	45	ESD 38 NA-90*



*Plugs with inch thread nickel-plated for simple distinctions