


TRICOFUEL®

Classic



40 | 25
bar

+60
-15
°C

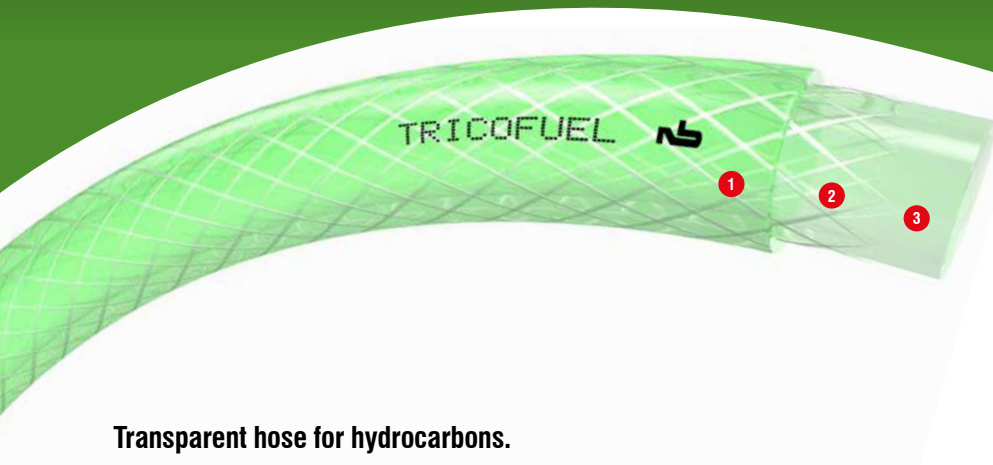

- 1 Flexible clear green PVC outer coating hydrocarbons resistant
- 2 Fibre reinforcement
- 3 Smooth clear green PVC core

Transparent hose for hydrocarbons.

Three layer design, with two clear PVC layers sandwiched around a polyester fibre braiding.

ALL FUEL LINES:

For pumps, circulation pumps, burners, vine heaters for frost prevention, heating equipment... Transfer of certain chemical products: petrols, certain acids and certain bases, oils, alcohols... (not suitable for aromatic hydrocarbons)

ALL SECTORS OF ACTIVITY:

Automotive industry, assembly plants, plastics industry, food production industry, construction, Garages (for cars, lorries & agricultural machinery), Woodworking, etc.

Marking

TRICOFUEL [Batch number]

ADVANTAGES

The composition of TRICOFUEL® hose material compound is designed specially for hydrocarbon transfer. Thus, it retains its flexibility, even after intensive use. It withstands repeated bending, whilst also offering excellent resistance to ageing. The clear aspect of both the core and the coating provides for easy visual control of fluids transfer.

CONNECTORS

Band, worm drive, screw or 'O' ring clamps. Swaged fittings can be used if they do not damage the hose.

CHEMICAL RESISTANCE

See table pages 102 to 105 column B.

	+/- mm		+/- mm		g/m		bar		°C	Green Transparent	
										25 m	50 m
6.3	+/-0.3	11	+/-0.3	2.35	81	40	13	44		050985	
8	+/-0.5	14	+/-0.5	3	129	40	13	56		051162	051175
10	+/-0.5	16	+/-0.5	3	152	30	10	70		051246	051259
12	+/-0.6	19	+/-0.6	3.5	211	30	10	84		051204	051217
15	+/-0.6	23	+/-0.6	4	297	30	10	105		052274	
20	+/-0.8	28	+/-0.8	4	373	30	10	140		052680	052693
25	+/-0.8	32.5	+/-0.8	3.75	420	25	8	175		050843	050856
30	+/-1.0	39	+/-1.0	4.5	603	25	8	210		052883	