


FLEXADUX® P 2 LF hellgrau

Very light weight and highly flexible spiral hose made of PVC

- Applications** steam extraction, textile fiber extraction, air conditioning / cooling technology, solvent vapor extraction, dust extraction
- Structure** PVC / soft PVC, grey / silver grey (similar RAL 7001), steel wire / spring steel wire / not coated / copper plated
- Temperature** 0°C up to 70°C
- Properties** very good flexibility, good compressibility, compressible, particularly small bending radius ($r < d$), good chemical resistance

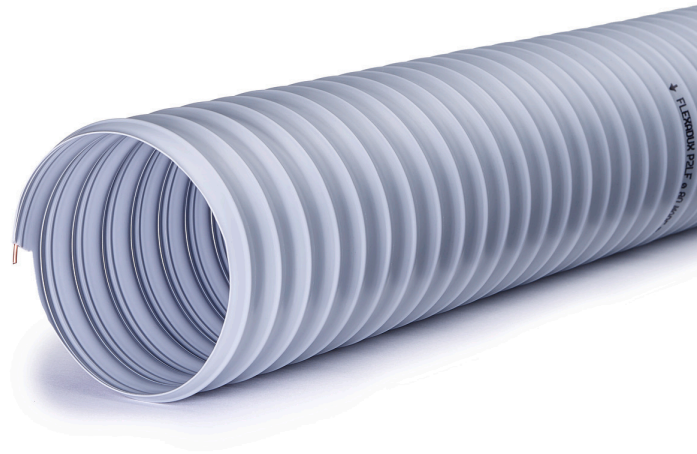

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Working Pressure (bar)	Max. Vacuum (bar)	Weight (kg/m)	Article Number
25	32	0,40	18	0,45	0,22	0,1400	21072025
30	37	0,40	21	0,40	0,20	0,1700	21072030
40	47	0,40	28	0,40	0,18	0,2100	21072040
50	57	0,40	35	0,35	0,15	0,2600	21072050
60	67	0,40	42	0,35	0,14	0,3100	21072060
70	77	0,40	49	0,30	0,12	0,3600	21072070
75	82	0,40	53	0,30	0,10	0,3800	21072075
80	87	0,40	56	0,25	0,09	0,4100	21072080
100	107	0,40	70	0,20	0,08	0,4800	21072100
120	127	0,40	85	0,20	0,07	0,5700	21072120
125	132	0,40	88	0,15	0,06	0,5900	21072125
140	147	0,40	95	0,10	0,06	0,6600	21072140
150	158	0,40	105	0,08	0,05	0,7100	21072150
175	183	0,40	123	0,06	0,04	0,8200	21072175
200	208	0,40	140	0,05	0,03	1,0200	21072200
250	258	0,40	175	0,04	0,03	1,2600	21072250
300	308	0,40	210	0,03	0,02	1,5100	21072300
400	408	0,40	280	0,02	0,01	2,3000	21072400
450	459	0,40	315	0,01	0,01	2,5800	21072450
500	509	0,40	350	0,01	0,01	2,8600	21072500
710	719	0,40	475	0,01	0,01	5,5100	21072710

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Working Pressure (bar)	Max. Vacuum (bar)	Weight (kg/m)	Article Number
800	809	0,40	535	0,01	0,01	6,2000	21072800