
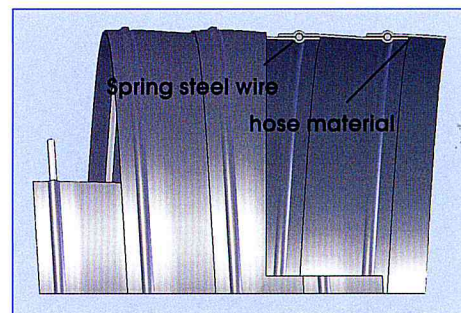


FLEXADUX® P 2 GEN

Light weight and very flexible PVC ducting

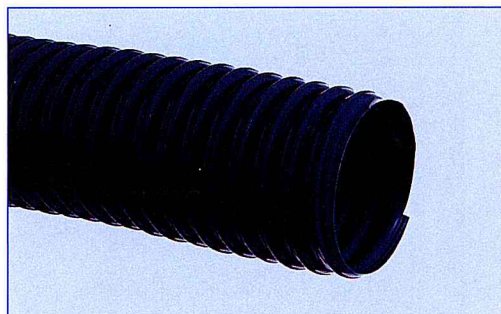

Material:
PVC.

Colour:
Grey.

Single Length:
6, 10 and 15 m.

Temperature Resistance:
0° up to + 70° C.

Applications:
Suction of air, fumes and dust,
suction of spinning fibres in textile industry,
air-conditioning and ventilation.

Properties:
Excellent flexibility, good compressibility.

Special Constructions:
P 2 KL – clear, transparent colour
P 2 V 10 – suction of kitchen fumes,
colour white
P 2 CCAI – antistatic ($R < 10^8$ Ohm),
colour: black, conform
to TRBS 2153.

TECHNICAL DATA

2.1

Dia. mm	Weight kg/m	Mat. Thickness mm	Bend. Rad. mm	Max. Work. Press. bar	Max. Vacuum bar
25	0,13	0,4	18	0,45	0,22
30	0,17	0,4	21	0,40	0,20
40	0,19	0,4	28	0,40	0,18
50	0,24	0,4	35	0,35	0,15
60	0,29	0,4	42	0,35	0,14
70	0,34	0,4	49	0,30	0,12
75	0,36	0,4	53	0,30	0,10
80	0,39	0,4	56	0,25	0,09
100	0,50	0,4	70	0,20	0,08
120	0,60	0,4	85	0,20	0,07
125	0,62	0,4	88	0,15	0,06
140	0,70	0,4	95	0,10	0,06
150	0,73	0,4	105	0,08	0,05
175	0,81	0,4	123	0,06	0,04
200	0,99	0,4	140	0,05	0,03
250	1,23	0,4	175	0,04	0,03
300	1,49	0,4	210	0,03	0,02
350	1,98	0,4	245	0,02	0,02
400	2,26	0,4	280	0,02	0,01
450	2,54	0,4	315	0,01	0,01
500	2,83	0,4	350	0,01	0,01
600	4,60	0,4	400	0,01	0,01

Further diameters available upon request.
Technical data are based on + 20° C.



SCHAUBURG RUHRKUNSTSTOFF GMBH

Weseler Str. 35 · P.O. Box 10 18 54 · 45478 Mülheim-Ruhr · Germany · Tel. +49 (0) 2 08 99 91-0 · Fax +49 (0) 2 08 5 33 74