

# VACUPRESS SUPERELASTIC

912904

# MERLETT

**MERLETT**  
is now  
**Continental**

Two-layer soft PVC hose with embedded galvanized steel spiral with polyester yarn reinforcement, for suction and delivery of food liquids.



SMOOTH SURFACE



FLEXIBILITY



TEMPERATURE RANGE

-25 °C 60 °C



CHEMICAL RESISTANCE

PVC Table

Ø nominal mm	Ø nominal inch	Ø i.d. mm	Ø o.d. mm	vacuum 23° m/H <sub>2</sub> O	working press. at 23° r:1:3 bar	working press. at 23° r:1:4 bar	bursting press. at 23° bar	bending radius mm	total thickness mm	Ø steel wire mm	spiral pitch mm	spiral direction	weight meter g/m	coil length m	Availability
19	3/4	19	28	9	20	16	60	70	4.5	1	8.5	right	475	60	In stock
25	1	25	35.5	9	16	12	48	80	5.2	1.2	9	right	680	60	In stock
30		30	40.5	9	16	12	48	90	5.2	1.2	9.5	right	770	60	In stock
32	1 1/4	32	42.5	9	16	12	48	100	5.2	1.2	9.5	right	800	60	In stock
35		35	47	9	14	10	42	115	6	1.4	10	right	1100	60	In stock
38	1 1/2	38	51	9	14	10	42	125	6.5	1.4	10.5	right	1200	30	In stock
40		40	53	9	14	10	42	130	6.5	1.4	11	right	1220	30	In stock
45	1 3/4	45	58	9	12	10	36	140	6.5	1.4	11	right	1400	30	In stock
50	2	50	64	9	12	10	36	150	6.5	1.6	11	right	1600	30	In stock
60		60	74	9	12	10	36	180	7	1.6	11	right	2000	30	In stock
63	2 1/2	63	77	9	12	10	36	190	7	1.6	11	right	2100	30	In stock
75		75	91	9	12	9	36	190	8	2	13.5	right	2850	30	In stock
76	3	76	92	9	12	9	36	210	8	2	13.5	right	2900	30	In stock
80		80	96	9	10	8	30	220	8	2	14	right	2950	30	In stock
90	3 1/2	90	107	9	10	8	30	250	8.5	2	14	right	3500	30	On demand
100		100	117	9	10	8	30	295	8.5	2	14.5	right	3950	30	In stock
102	4	102	119	9	10	8	30	300	8.5	2	14.5	right	4000	30	In stock
120		120	138	9	8	6	24	350	9	2.5	15	right	5300	20	In stock



CRUSHING RESISTANCE



FOR FOOD

Suitable for contact with foodstuff according to the declaration of conformity.



ANTI-UV





O-PHTHALATE FREE



$\emptyset$ nominal <i>mm</i>	$\emptyset$ nominal <i>inch</i>	$\emptyset$ i.d. <i>mm</i>	$\emptyset$ o.d. <i>mm</i>	vacuum 23° <i>m/H<sub>2</sub>O</i>	working press. at 23° r:1:3 <i>bar</i>	working press. at 23° r:1:4 <i>bar</i>	bursting press. at 23° <i>bar</i>	bending radius <i>mm</i>	total thickness <i>mm</i>	$\emptyset$ steel wire <i>mm</i>	spiral pitch <i>mm</i>	spiral direction	weight meter <i>g/m</i>	coil length <i>m</i>	Availability
127	5	127	145	9	7	5	21	370	9	2.5	15	right	5800	20	On demand
150		150	169	9	5	3	15	480	9.5	2.5	15.5	right	6800	20	On demand
152	6	152	171	9	5	3	15	480	9.5	2.5	15.5	right	6850	20	In stock
200		200	222	9	3	2.5	9	650	11	3	22	right	10300	10	On demand
203	8	203	225	9	3	2.5	9	650	11	3	22	right	10500	10	On demand

## GALLERY

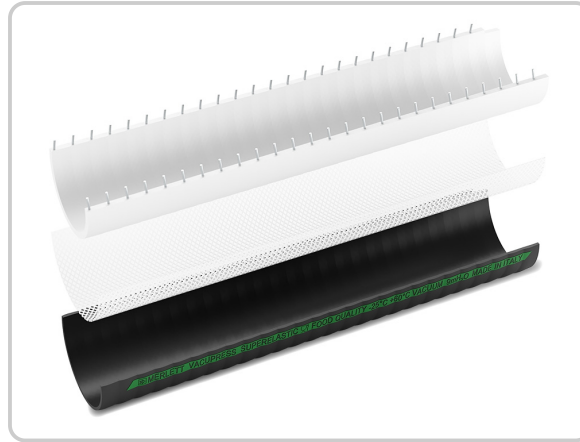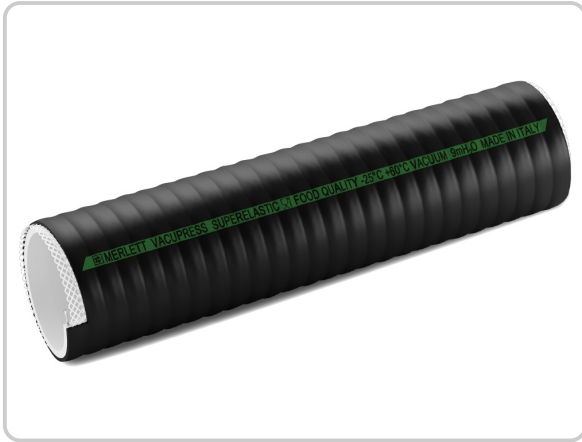

## RELATED PRODUCTS



**VACUPRESS FLEX**  
**912934**